


# Dolan-Jenner

## SAFESCAN<sup>®</sup>9 Safety Light Curtain

**NEW!**

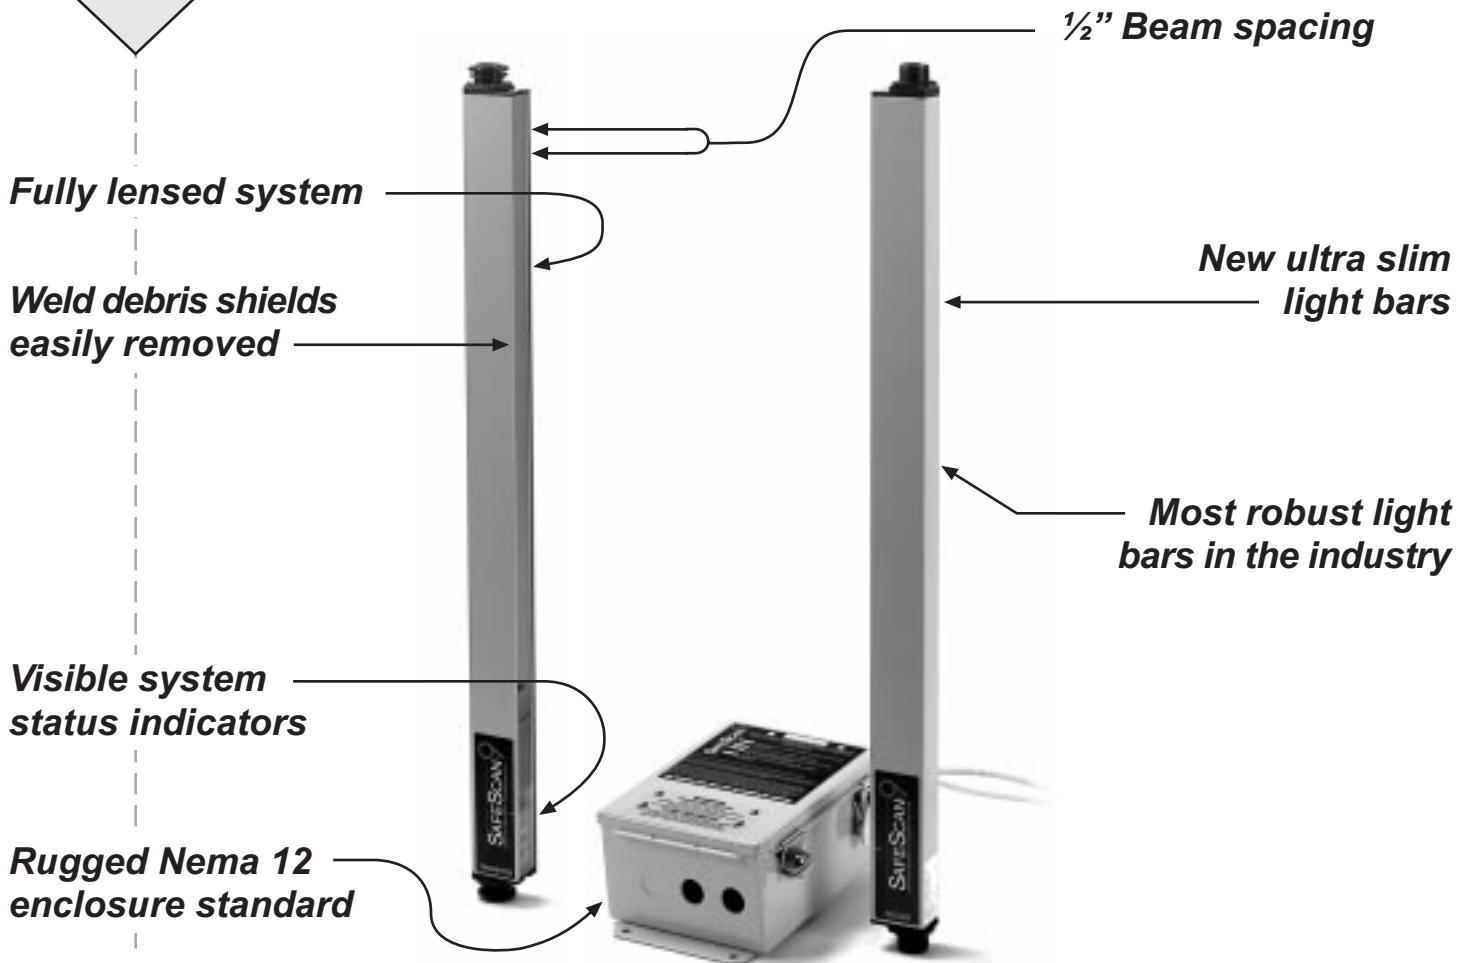

- **Minimum object size of 1"**
- **6" to 64" of protected height in 4" increments available**
- **Redundant positive guided safety relays standard; relays field replaceable**
- **Built with state of the art Surface Mount Technology**
- **Self-checking circuitry**
- **Automatic channel deselect or blanking standard: fixed and floating**
- **Immune to strobe, weld flash, EMI and RFI**
- **Meets or exceeds OSHA, ANSI, RIA, CSA and other world standards**
- **Fully compatible with PSDI regulations**
- **Standard operating range of 0-30'**